

**Original Research Article**

**Effect of Thermodynamic Parameters on the Concentration of Pollutants in Produced Water from Crude Oil Production**

**ABSTRACT:**

Thermodynamic parameters such as temperature and pressure of petroleum reservoirs are among the most important physical characteristics which are required to effectively produce crude oil from the reservoirs. Oil and gas reservoir pressures determines if external energy is required to force well fluids out of the reservoir; the temperature of the reservoir determines the flow characteristics of the produced fluid through the tubing and along the flowline by its influence on the viscosity of the fluid. The produced fluid is made up of produced water, crude oil and natural gas. Produced water contains several substances which at certain concentrations could pose health threats to living organism in the environment. Local regulatory authorities do not allow discharge of produced water to the environment except the prescribed limits for selected pollutants contained in the produced water are not exceeded. This has led to post-production treatment of produced water in most crude oil production facility in order to meet these limits. This treatment increases the cost of production of crude oil thereby reducing the profitability of crude oil production process. It is believed that thermodynamic parameters such as temperature and pressure are capable of either decomposing or altering the structure of some pollutants thereby reducing their concentration in the produced water at the end of the production process. This research has employed an environmental process engineering simulator (Aspen HYSYS) to determine which thermodynamic variables of temperature and pressure could be altered in combination to reduce the concentration of pollutants in produced water to meet the regulatory limits prior to discharge.

**Keywords:** Produced water, pollutant concentration, production process, crude oil, thermodynamic parameters, environmental process engineering

**1. INTRODUCTION**

**Comment [U1]:** Remove 'the' from the sentence.

**Comment [U2]:** Insert 'produced' just before 'from'

**Comment [U3]:** Remove 'which are'....

**Comment [U4]:** Replace 'determines' with 'determine'

**Comment [U5]:**

**Comment [U6]:** Rephrase sentence: if external energy is required to force fluids out of reservoir

**Comment [U7]:** Delete 'produced' before water

**Comment [U8]:** Mention a few examples from the list of contaminants.

**Comment [U9]:** Local regulatory authorities censor the produced water to ascertain the dose of contaminants does not exceed the global health standards

**Comment [U10]:** This requirement has....

**Comment [U11]:** Furthermore, it is believed...

Crude oil does not exist alone in the reservoir; it **exists** with either natural gas, formation water or both. **When** crude oil and natural gas is brought to the surface through the production processes, this water is also brought to the surface alongside hydrocarbons. This water may originate as natural **water** in the formations holding oil and gas or **can** be water that was previously injected into those formation through secondary recovery techniques like water flooding (injection water) or steam flooding (condensation water) [1]. There is also possibility of some additional water from other formations adjacent to the hydrocarbon-bearing **layers** to become part of the produced water that comes to the surface [2]. Produced water is therefore a mixture of injected water, formation water, production chemicals, and hydrocarbons [3,4,5,6]. The composition of produced water depends on the chemistry of the rocks or the geologic formation, lifetime of the reservoir, and the type of hydrocarbon produced [4].

**Comment [U12]:** It is usually found as an heterogenous mixture with ...

**Comment [U13]:** Replace 'when' with 'As' crude oil and natural gas is exploited, water is expelled from the mixture alongside hydrocarbons.

**Comment [U14]:**

**Comment [U15]:**

**Comment [U16]:** Replace 'water' with 'bubbles'

**Comment [U17]:** Or it can be water...

**Comment [U18]:** ...layers, they eventually become part ...

**Table 1. Concentration (µg/l) ranges for several metals in produced water from Scotian Shelf and the Grand Banks in Canada compared to produced water in the Gulf of Mexico, the North Sea and Offshore Nigeria.**

Metal	Gulf of Mexico <sup>16</sup>	North Sea <sup>16</sup>	Scotian Shelf <sup>16</sup>	Grand Banks <sup>16</sup>	Offshore Nigeria
Arsenic	0.5-31	0.96 – 1.0	90	<10	NA
Barium	81,000 - 342,000	107,000 – 228,000	13,500	301 – 354	NA
Cadmium	<0.05 – 1.0	0.45 – 1.0	<10	<0.02 -0.04	NA
Chromium	<0.1 – 1.4	5 - 34	<1 – 10	<1	0.8 -10
Copper	<0.2	12 – 60	137	<5	1 - 60
Iron	10,000 – 37,000	4,200 -11,300	12,000 – 28,000	1,910 – 3,440	220 – 5,000
Lead	<0.1 – 28	0.4 – 10.2	<0.1 – 45	0.09 – 0.62	<1 – 120
Manganese	1,000 – 7,000	NA	1,300 – 2,300	81 -565	NA
Mercury	<0.1 – 0.2	0.017 – 2.74	<10	NA	NA
Molybdenum	0.3 – 2.2	NA	NA	<1	NA
Nickel	<1.0 – 7.0	22 – 176	<0.1 420	1.7 – 18	NA
Vanadium	<1.2	NA	NA	<0.1 – 0.6	NA
Zinc	10 – 3,600	10 – 340	10 – 26,000	<1 - 27	10 - 215

Source: Neff et al., 2002.

**It** has a complex composition, but its constituents can be broadly classified into organic and inorganic compounds. These comprise several thousand compounds that vary in concentration between wells [7,8] and over the lifetime of a well; including dissolved and dispersed oil components, aromatic hydrocarbons, alkylphenols, grease, heavy metals, radionuclides, production chemicals, dissolved formation minerals, salts, dissolved gases (including CO<sub>2</sub> and H<sub>2</sub>S), scale products, waxes, microorganisms, and dissolved oxygen [9,10,11,12,13,14]. Produced water can also contain large amounts of organic material, particles, inorganic salts, and low molecular weight organic acids like

**Comment [U19]:** Despite the complex nature of the crude, its constituents can be generally classified as either organic or inorganic...

50 acetic acid and propionic acid and can have high levels of sulphur and sulphide. The injected water  
51 component of produced water can bring traces of added chemicals such as biocides, corrosion  
52 inhibitors, scale inhibitors, emulsion breakers, coagulants flocculants and oxygen scavengers to the  
53 surface [15,16]. Sulphate reducing bacteria may also be present in produced water [17].

54 There are various chemical constituents that could be present in the produced water. These  
55 chemicals, individually or collectively, could have significant impact on the environment. Some of the  
56 impacts include disruption of physiological and behavioural activities of the aquatic life,  
57 bioaccumulation, and deterioration of physical environment [18]. The major constituents of concern in  
58 produced water are the salt content (often expressed as salinity, conductivity, or total dissolved solids  
59 [TDS]), oil and grease (which could be found in the form of free oil, dispersed oil or dissolved oil),  
60 inorganic and organic toxic compounds (which may have been introduced through production  
61 chemicals or by leaching of formation rock or hydrocarbon) and naturally occurring radioactive  
62 materials. The composition of produced water affect how they are treated, used, and/or disposed [19].

63 Produced water receives various types of treatment before it is disposed or reused. The treatment  
64 and disposal techniques proposed for produced water depends on the location (offshore or onshore),  
65 the composition of the produced water, the local legislations concerning produced water and the  
66 overall crude oil production philosophy of the company. The treated produced water could be re-  
67 injected (including injection for enhanced recovery, disposal or sent to offsite commercial disposal),  
68 discharged to the water body, evaporated or re-used for beneficial purposes (irrigation, dust and ice  
69 control on the road) [4,20]. The choice of treatment process or technology depends on how clean the  
70 produced water is required to be before it is sent to its destination. For example, produced water must  
71 be treated to remove oil and grease and toxic chemicals before discharging it to the ocean from an  
72 offshore platform. Produced water that is discharged to onshore freshwater rivers must be further  
73 treated to reduce salt content [8]. Water that is injected for either enhanced recovery or for disposal is  
74 treated in a different way from water that is discharged. The treatment processes used prior to  
75 injection are designed to remove free oil, solids, and bacteria. Chemicals are often used to enhance  
76 treatment processes and to protect underground formations and equipment.

77 The Environmental Guidelines and Standards for Petroleum Industry in Nigeria (EGASPIN), a  
78 legislation of the Department of Petroleum Resources (Nigeria's oil and gas industry regulator)

**Comment [U20]:** Replace 'disposal' with  
'disposed'

**Comment [U21]:** Replace 'it' with 'its'

79 mandates that produced water be treated to acceptable limits prior to disposal, re-injection or reuse  
80 [21]. The capital and operating costs associated with most produced water treatment systems could  
81 be high therefore the need for economical management of produced water in oil fields is critical [4,22].  
82 In the management of produced water, onshore and offshore oil and gas operators are faced with  
83 numerous challenges which include exceeding discharge oil concentrations, plugging of lines, valves  
84 and orifices due to deposition of inorganic scales, growth of bacteria that plug lines and valves or  
85 result in formation of harmful products and plugging of disposal wells and producing formations by  
86 solid particles and suspended oil droplets [23].

87 Several techniques and materials have been employed to remove oil and other pollutants from  
88 produced water. Raw eggshell has been employed and it was reported to be effective [24]. CPC  
89 modified barley straw, activated carbon, bentonite, carbonized rice husk, walnut shell and fatty acid  
90 grated banana trunk have been used in several research works to removed oil and other pollutants  
91 from produced water [25,26,27,28,29,30]. Most of these research methods were not able to meet the  
92 regulatory limits for discharge of the treated produced water. The commonly used conventional  
93 treatment schemes which employ numerous technologies still achieve inconsistent results as the  
94 continual changing of inlet conditions often limit their effectiveness. The use of heavy doses of  
95 chemicals by conventional systems is also creating an ongoing economic and chemical management  
96 burden for the oil and gas industry [22]. Modern hydrocarbon recovery systems have shown to be  
97 more effective than the conventional solution through the provision of operational flexibility, reduction  
98 of lost energy, savings on chemical additives, low maintenance cost with fouling, elimination of  
99 excursions and generally higher efficiencies [22]. The costs of these modern treatment schemes are  
100 however very prohibitive especially for marginal fields.

101 In order to avoid the cost-prohibitive produced water treatment methods that can make crude oil  
102 production in marginal field unviable, a combination of variation of the thermodynamic variable of  
103 temperature and pressure have been applied on the production process until the treated produced  
104 water meet the limits using process simulation with Aspen HYSYS. The result of this research may be  
105 applied to design of crude oil production process or to the debottlenecking of existing production  
106 process to meet the discharge or disposal limits for produced water set by local authorities without  
107 post production treatment.

**Comment [U22]:** Insert a comma after therefore, the need..

**Comment [U23]:** Replace 'plug' with 'clog' lines and valves

**Comment [U24]:**

**Comment [U25]:** Replace 'plugging' with 'clogging'

**Comment [U26]:** Replace 'removed' with 'remove'

**Comment [U27]:** Replace the references with [25-30]

**Comment [U28]:** Replace 'shown' with 'proven'

**Comment [U29]:** Insert 'system' before through the ....

**Comment [U30]:** Different combinations of the thermodynamic variables i.e. temperature and pressure have been .....

**Comment [U31]:** Replace 'on' the production process with 'to' the production ...

**Comment [U32]:** Until the treated produced water meets the required standard using process.....

**Comment [U33]:**

## 2. MATERIALS AND METHODS:

### 2.1 Case Study Process Plant

The Izombe Flow Station (IFS), which is currently operated by Addax Petroleum Development Nigeria Limited, is an onshore crude oil and natural gas facility located Oil Mining Lease (OML) 124 in Izombe, Oguta Local Government Area of Imo State, Nigeria. The flow station, which was commissioned on 6 June 1975, is a complete self-sufficient facility containing Oil and Gas Production and Processing Systems: Oil Production Process; Gas Compression and Re-injection Systems; and Produced Water Re-injection Unit.



**Fig. 1. The Izombe Flow Station Manifold**

IFS was originally designed to receive 37,000 barrels per day of well fluids from Izombe, Ossu, Njaba and Jisike fields. However, the current crude oil production of the facility is 3,300 barrels per day and the crude oil - produced water ratio is 0.3. The well fluids are separated into their three components: oil, gas and water; and each component is further processed for final disposition. Crude oil is processed for export, natural gas is compressed to be used as either fuel, lift gas or re-injection gas while produced water is prepared for disposal through injection to the available injection wells. The flow station houses 48 mmscf/d capacity

**Comment [U34]:** Insert space between 'wells' and 'The'

**Comment [U35]:** At first mention, always spell out words and enclose abbreviation in bracket.

compressors which are made up of eight units: six (6) low pressure (LP) and two (2) high pressure (HP) compressors. The compressed gas is used as lift gas for Izombe and Ossu gas-lifted wells. Excess of the compressed gas is re-injected into gas disposal well.

## 2.2 Produced Water and Reagents:

Samples of produced water were collected from three points at the Izombe flow station on Friday, November 17, 2017. Three samples of varying sizes were collected in the recommended containers at each point. The samples for physio-chemistry analysis were collected in two-litre plastic containers. The samples for metals and cations were collected in 300 ml plastic bottles while the samples for hydrocarbon concentration check were collected in 1000 ml Amber Glass bottles. The samples for metals and cations and those for hydrocarbons were preserved with 3ml Nitric acid and 4ml Sulphuric acid respectively. The sample points are the production manifold, the outlet of the line heater and the inlet of the water injection pump. The sample at the production manifold is aimed at obtaining the condition of the produced water on arrival at the flow station prior to treatment. The samples from the outlet of the line heater are expected to show the effect of heat on the pollutants while the last samples collected at the inlet of the water injection pump are expected to reveal the effect of further treatment on the pollutant's concentrations prior to the disposal of the produced water into a selected reservoir. The tables below show the conditions under which the samples were collected and the initial characteristics of the produced water samples respectively.

**Table 2. Sample collection conditions**

Points of Collection	Time of Collection	Collection Point Pressure (psi)	Collection Point Temperature (°C)
Production Manifold	14:25 hrs	48	39
Outlet of Line Heater	14:35 hrs	23	52
Inlet of Water Injection Pump	14:45 hrs	14.7	37

**Table 3 Characteristics of produced water at the point of collection.**

Parameters	Manifold	Line Heater	WIJ Pump
PH	7.10	6.97	6.68
Oil Content (ppm)	3,000	146	84
Total Dissolved Solids (mg/litre)	17,000	16,600	12,400
Chemical Oxygen Demand (mg/litre)	43	36	30

## 2.3 Method:

The collected samples were subjected to laboratory analysis to determine the concentrations of some selected pollutants in the samples. Different analytical approaches were employed in the process. The results of the laboratory tests are tabulated below:


**Table 4. Results of the laboratory tests on samples collected at various points on Izombe Flow Station on 17 July 2017.**

S/N	Sample Parameter	Analytical Method	Concentration at Manifold (mg/l)	Concentration at Line Heater (mg/l)	Concentration at WIJ Pump (mg/l)
1	pH	pH Meter	7.10	6.97	6.68
2	Benzene	GC (FID)	0.50	0.19	0.02
3	Toluene	GC (FID)	0.52	0.15	0.08
4	Phenol	HACH DR 3900	0.72	0.21	0.12
5	Lead	AAS (FLAME)	1.25	0.98	0.41
6	Chromium	AAS (FLAME)	0.89	0.81	0.67
7	Phosphate	HACH DR 3900	0.03	0.12	0.14
8	Ammonia	HACH DR 3900	10.65	7.90	5.50
9	Nitrates	HACH DR 3900	20	22.89	16.94
10	TDS	TDS Meter	17,100	16,600	12,400
11	Chlorides	Titrimetry	6,000	5,500	5,200
12	Salinity	Titrimetry	9,900	8,665	7,175

In the analysis, the pollutants were considered as parameters in the produced water samples which were analysed following American Society for Testing and materials (ASTM) standard methods recommended in the Standard Methods for the Examination of water and Wastewater by American Public Health Association (APHA) [33] and Recommended Practice for Analysis of Oilfield Waters (API RP – 45) [34]. The concentrations of the of the hydrocarbon pollutants (BTEX) in the produced water was determined by Gas Chromatography with Flame Ionisation Detector (GC -FID) but phenol, phosphates, nitrates and ammonia concentrations were determined by HACH DR 3900 spectrophotometer. The concentrations of the metals in the produced water were determined by Flame Atomic Absorption Spectroscopy (Flame AAS). The chlorides and salinity content were determined by titrimetry.

#### **2.4 Environmental Process Simulation:**

Aspen Hysys 6.2 has been used for this simulation. *Hysys* is designed and manufactured by Aspen Technology Incorporated in the United States of America. It is a software with integrated steady state and dynamic modelling capabilities where the same model can be evaluated from either perspective with full sharing of process information. The process engineering software provides extremely powerful approach to steady state modeling. It has been designed to allow for the use of multiple property packages, creation of pre-built templates and use of multiple flowsheets. Soave-Redlich-Kwong (SRK) was the base property package selected for this simulation. The pollutant compositions were expressed in mass fraction. Some of the pollutants include chromium, iron, copper, lead, phosphate, and zinc.

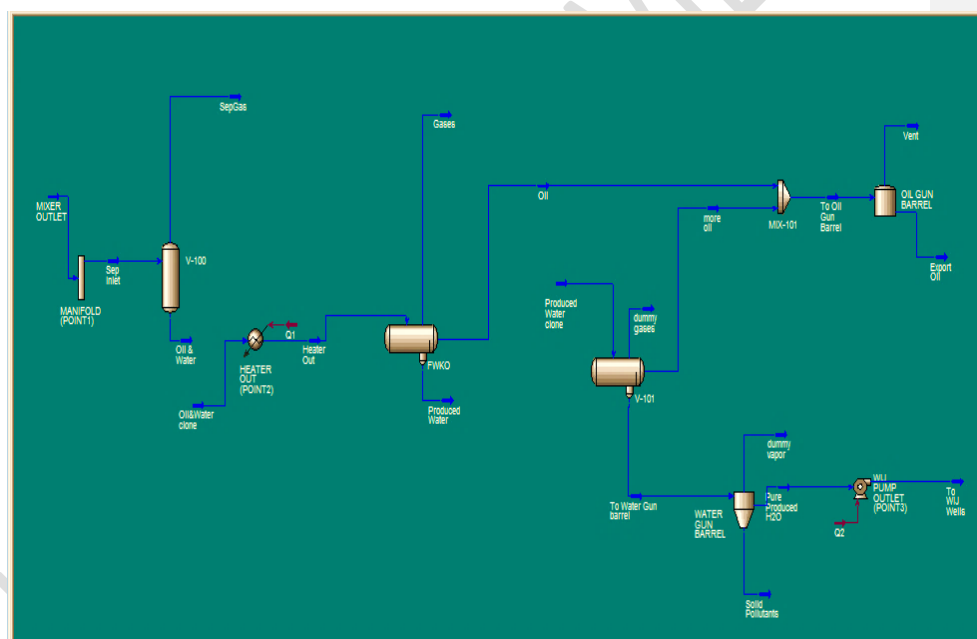

**Fig. 2. Process flow diagram of the facility showing the three sampling points**

### 3. RESULTS AND DISCUSSION

The samples of produced water were analysed in IESL Laboratories, Port Harcourt, Rivers State, Nigeria. It is a standard laboratory which is also approved by the Department of Petroleum Resources, Nigeria's oil and gas industry regulator. The results of the effects of temperature and pressure from process simulation are found below.



3.1. Effect of temperature on the concentration of pollutants:

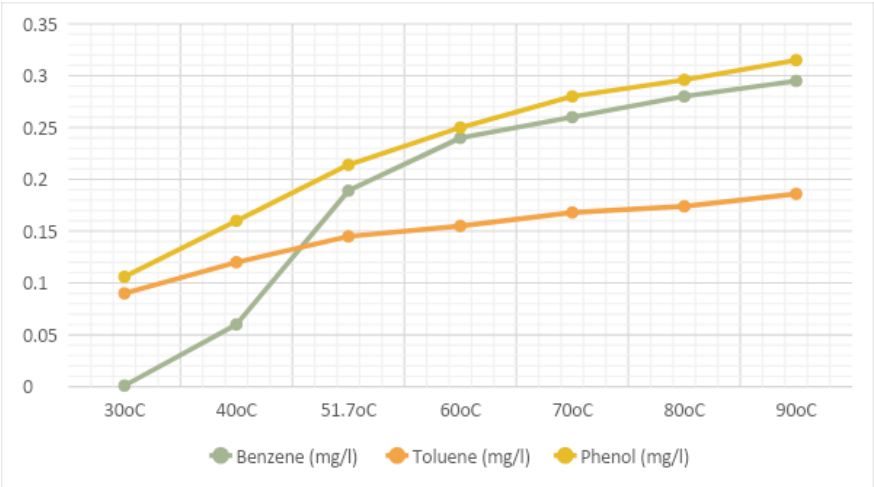


Fig. 3a. Concentrations of hydrocarbon pollutants at different temperatures at the heater outlet.

3.2. Effect of pressure on the concentration of pollutants:



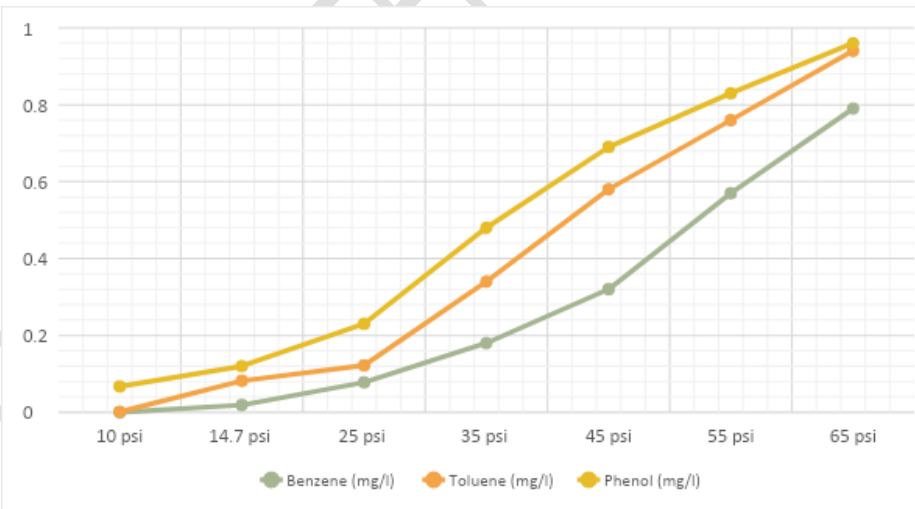


Fig. 3b. Concentrations of hydrocarbon pollutants at different pressures at the WIJ pump.

3.3. Effect of temperature and pressure combination on concentration of pollutants:

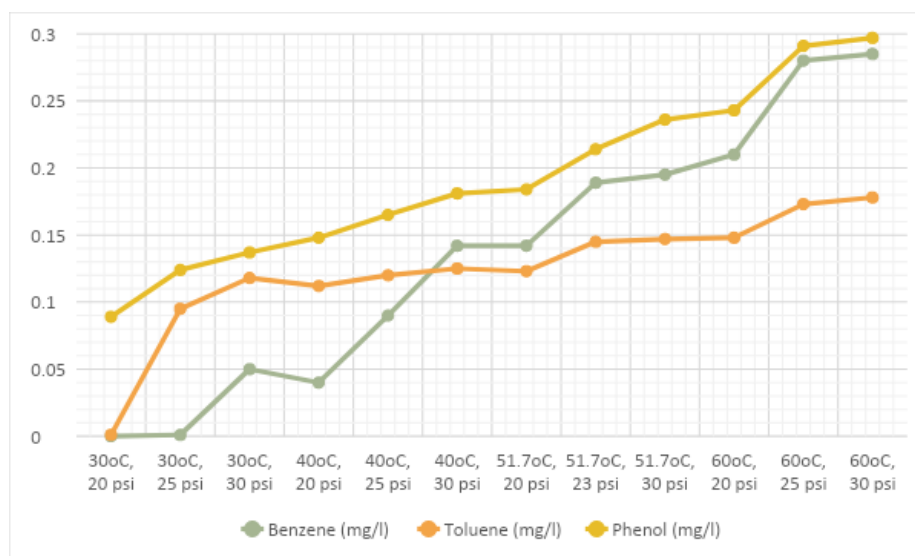

**Fig. 3c. Concentrations of hydrocarbon pollutants at various pressure and temperature combinations at the heater outlet.**

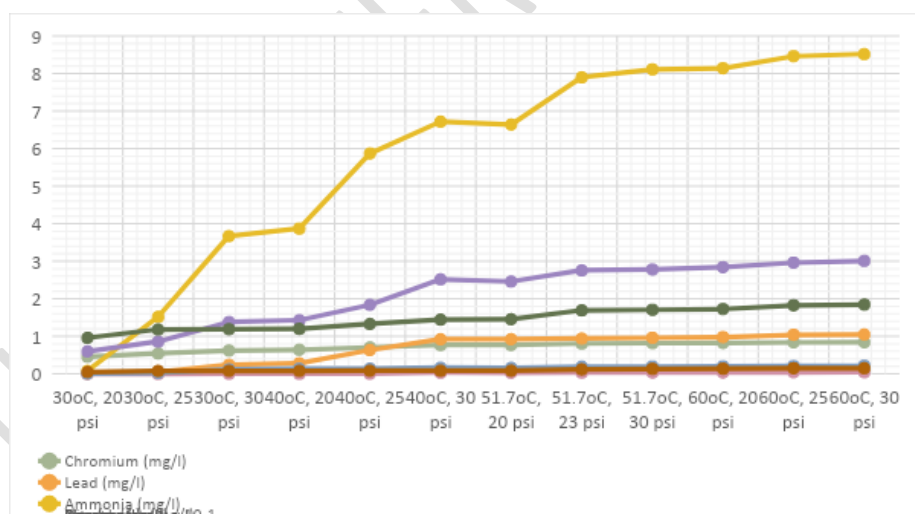


**Fig. 3d. Concentrations of other pollutants at various pressure and temperature combinations at the heater outlet.**

### 3.4. Analysis of results


The results obtained from the simulations have been grouped according to the similarity in behavior, chemical compositions or test methods of the pollutants. The pollutants whose concentrations are above the regulator's limits at the WIJ pump were considered priority since disposal of produced water at these conditions will attract sanctions and fines from the regulator. Pressures and temperatures have been varied at the selected points along the production process within the design limits of the facility and the effect of these variation on the concentrations of the pollutants for many pressure-temperature combinations recorded.

**Comment [U36]:** Replace 'regulator's with 'regulation'

The thermodynamic variables of temperature and pressure have been found to affect the concentration of each of the pollutants in the produced water at the sampling points. The concentrations of the pollutants generally decreased along the production process from the manifold to the WIJ pumps. Figures 4a and 4b below indicate that the concentrations of benzene, lead, ammonia, chromium and nitrates at the WIJ pumps exceeded the Department of Petroleum Resources' limits.

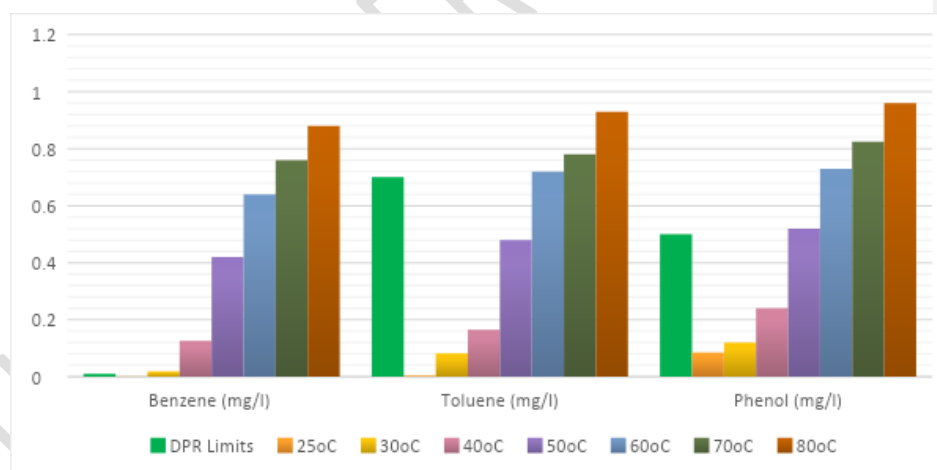


**Fig. 4a. Concentration of hydrocarbon pollutants against the regulator's limit at various temperatures at the WIJ pump**

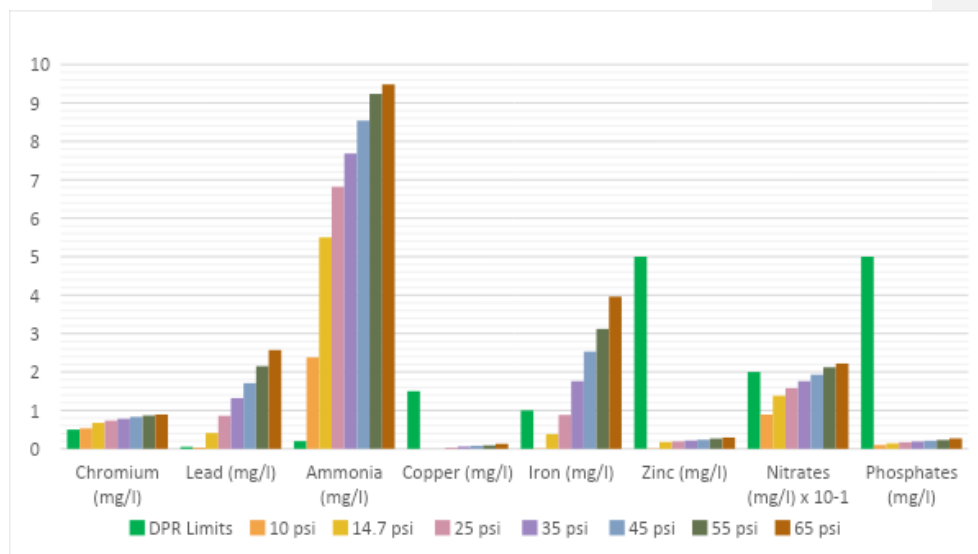


**Fig. 4b. Concentration of other pollutants against the regulator's limit at various pressures at the WIJ pump.**

The results of the simulation process showed that although the concentration of the pollutants decreases along the production process, it increases with temperature and pressure increase at the sample points on the production process. The various components of the production process are designed to operate within temperature and pressure range hence the simulation considered these design range for the thermodynamic variables. The results of the simulation process showed that the temperature of 30°C and pressure of 20 psi at the heater outlet is the optimal condition since it gave the best results which met the regulator's limits for all pollutants. Moreover, the Free Water Knock Out (FWKO) vessel which receives the fluid from the line heater can operate at these conditions.

**Comment [U37]:** Replace 'decreases' with 'decreased'.....it 'increased' with temperature and pressure increased at the ...

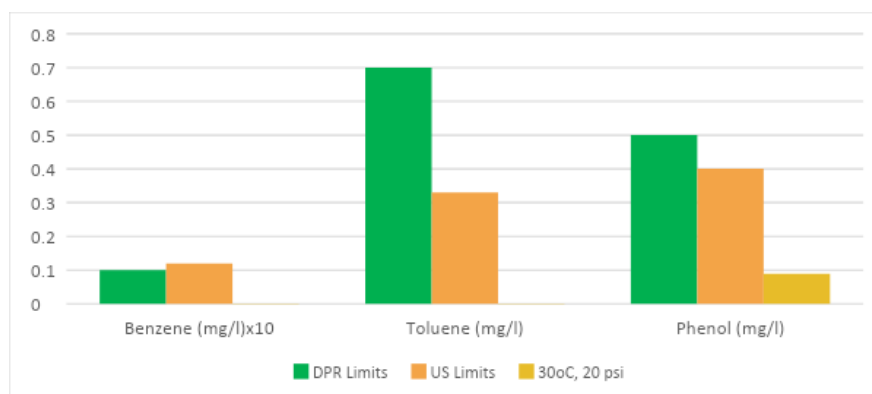

**Fig. 4c. Concentrations of hydrocarbon pollutants at optimum conditions (30°C,20psi) against Nigeria's and USA's regulatory limits**

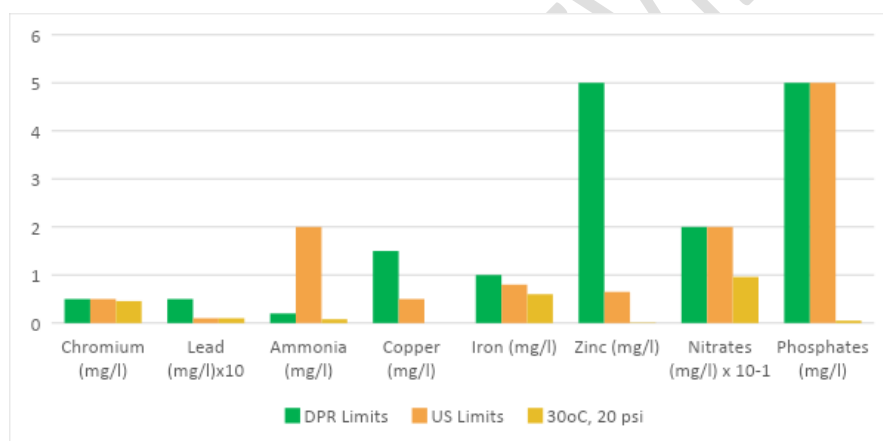

**Fig. 4d. Concentrations of other pollutants at optimum conditions (30°C,20psi) against Nigeria's and USA's regulatory limits**

#### 4. CONCLUDING REMARKS AND OUTLOOK

Environmental process simulation using Hysys 6.2 has been used to show that temperature and pressure variables could reduce the concentration of pollutants in produced water from crude oil production to meet the limits acceptable for disposal by the regulator. The produced water sample at the manifold represent the composition of the produced water before introduction into the flowstation, the sample collected at the heater outlet indicates the composition of the produced water at the mid-point of the production process while the samples collected at the Water Injection (WIJ) pump represents the state of the produced water at the end of the production process prior to disposal. The

**Comment [U38]:** Replace 'indicates' with 'indicated'

laboratory results indicate decrease in the concentration of the pollutants in the produced water along the production process but inability to meet the discharge limit set by the regulator hence the need for the research. There were challenges to ensure that quality data on the concentrations of the pollutants in the produced water were used for simulation but some quality control measures like contamination checks and repetition of tests were employed in the laboratory to ensure that good quality data were obtained. The results of the work suggest that there is an optimal point (temperature, pressure) at the which the pollutant concentration is reduced to the minimum without incurring production losses. This result is required to save the cost involved in further treatment of produced water and thereby improves the cost per barrel of produced crude especially for ageing oil fields. The effect of other variables like residence time and production chemicals on the concentration of the pollutants in produced water prior to discharge could also be studied.

**Comment [U39]:** Replace 'hence' with 'prompted'

**Comment [U40]:** Replace 'were' with 'was'

**Comment [U41]:** Cost incurred by further treatment...

**Comment [U42]:** Replace 'residence' with 'resident' time..

#### COMPETING INTERESTS DISCLAIMER:

Authors have declared that no competing interests exist. The products used for this research are commonly and predominantly use products in our area of research and country. There is absolutely no conflict of interest between the authors and producers of the products because we do not intend to use these products as an avenue for any litigation but for the advancement of knowledge. Also, the research was not funded by the producing company rather it was funded by personal efforts of the authors.

#### 5. REFERENCES

1. Produced Water Society. Produced Water 101. Produced Water Society Online Publication, 2017. Accessed 18 August 2019. Available: <http://www.producedwatersociety.com/produced-water-101/>
2. Veil JA. U.S. produced water volumes and management practices in 2012: Prepared for ground water protection council. Orlando: Veil Environmental, LLC; 2015
3. Stromgren T, Sorstrom SE, Schou L. Acute toxic effects of produced water in relation to chemical composition and dispersion. *Marine Environmental Research*.1995; 40 (2): 147–169
4. Igunnu ET, Chen GZ. Produced water treatment technologies. *International Journal of Low-Carbon Technologies*. 2014; 9 (3): 157–177
5. Reynolds RR. Produced water and associated issues: a manual for the independent operator. *Oklahoma Geological Survey Open-File Report*. 2003; vol. 6: 1–56

- 290 6. Chan LH, Starinsky A, Katz A. The behavior of lithium and its isotopes in oilfield brines:  
291 evidence from the Heletz-Kokhav field, Israel. *Geochimica et Cosmochimica Acta*. 2002; 66  
292 (4): 615–623
- 293 7. Patin S. Environmental impact of the offshore oil and gas industry. *New York: Eco Monitor*  
294 *Publishing*; 1999
- 295 8. Veil JA, Puder MG, Elcock D, Redweik RJ. Jr. A white paper describing produced water from  
296 production of crude oil, natural gas, and coal bed methane. *Prepared for the U.S. Department*  
297 *of Energy, Energy Technology Laboratory*. 2004.
- 298 9. Fakhru'l-Razi A, Pendashteh A, Abdullah LC, Biak DRA, Madaeni SS, Abidin ZZ. Review of  
299 technologies for oil and gas produced water treatment. *Journal of Hazardous Materials*. 2009;  
300 170 (2-3): 530–551
- 301 10. Ray JP, Rainer-Engelhardt F. Produced Water: Technological/Environmental Issues and  
302 Solutions. *Environmental Science Research, Springer*. 1992; 46
- 303 11. Hansen BR, Davies SRH. Review of potential technologies for the removal of dissolved  
304 components from produced water. *Chemical Engineering Research and Design*. 1994; 72:  
305 176–188
- 306 12. Hayes T, Arthur D. Overview of emerging produced water treatment technologies. *In*  
307 *Proceedings of the 11th Annual International Petroleum Environmental Conference*.  
308 Albuquerque, NM, USA; 2004
- 309 13. Sirivedhin T, McCue J, Dallbauman L. Reclaiming produced water for beneficial use: salt  
310 removal by electrodialysis. *Journal of Membrane Science*. 2004; 243 (1-2): 335–343
- 311 14. Neff JM, Lee K, Deblois, EM. Produced water: overview of composition, fates, and effects. *In*:  
312 Lee, K., Neff, J. (Eds.), *Produced Water*. New York: *Springer*; 2011
- 313 15. Johnsen S, Utvik TI, Garland E, de Vals B, Campbell J. Environmental fate and effects of  
314 contaminants in produced water. *In: Paper Presented at the Seventh International*  
315 *Conference on Health, Safety and Environment in Oil and Gas Exploration and Production*.  
316 Richardson, Texas: Society of Petroleum Engineers, SPE 86708; 2004.
- 317 16. Neff JM. 2002. Bioaccumulation in Marine Organisms. Effects of Contaminants from Oil Well  
318 Produced Water. Amsterdam: *Elsevier*; 2002.

17. Macedo de Souza P, Regina de Vasconcelos FG, Marques JM, Bizzo HR, Blank AF, Groposo C et al. Growth inhibition of Sulphate-Reducing bacteria in produced water from the petroleum industry using essential oils. *Molecules*. 2017; 22: 648. Accessed 18 August 2019. Available: <https://doi.org/10.3390/molecules22040648>
18. Igwe CO, Saadi AAL, Ngene SE. Optimal Options for Treatment of Produced Water in Offshore Petroleum Platforms. *Journal of Pollution Effect and Control*. 2013; 1:102. DOI: 10.4172/2375-4397.1000102
19. Srinivasan A, Viraraghavan K. Removal of oil by walnut shell media. *Bioresource Technology*. 2008; 99: 8217-8220
20. Dittrock P. Water constraints drive recycle, reuse technology. *Oil & Gas Journal*. 2017; 115:8. Accessed 1 February 2019. Available: <https://www.ogj.com/articles/print/volume-115/issue-8/drilling-production/water-constraints-drive-recycle-reuse-technology.html>
21. Arthur JD. Technical summary of oil & gas produced water treatment technologies. Tulsa: ALL consulting, LLC; 2005
22. Hahn C. Optimizing the produced water handling process: Modern solutions for hydrocarbon recovery and particle-liquid separation in oil and gas. *Water Technology*. 2017. Accessed 1 February 2019. Available: <https://www.watertechnonline.com/hydrocarbon-recovery-oil-gas-challenges/>
23. Harati HM. Examination of produced water from the Al-Hamada oilfield, Libya. MPhil Thesis. Sheffield Hallam University, United Kingdom; 2012
24. Muhammad UE, Abdulsalam S, Markarfi Y. Oil removal from oil polluted water using eggshell. *Civil and environmental research*. 2012; 2 (4): 52-63
25. Shashwat S, Milind V, Radha V. Treatment of oil spill by sorption technique using fatty acid grafted sawdust. *Chemosphere*. 2006; 64: 1026-1031
26. Kumagai S, Noguchi Y, Kurimoto Y, Takeda K. Oil adsorbent produced by the carbonisation of rice husks. *Waste Management*. 2007; 27: 557-561
27. Othman M, Akil H, Kim J. Carbonaceous hibiscus cannabinus L. for treatment of oil and metal contaminated water. *Biochemical Engineering Journal*. 2008; 41: 171-174. DOI: 10.1016/j.bej.2008.04.010

**Comment [U43]:** Ensure consistent reference style.



- 348 28. Ibrahim S, Wang S, Anj H. Removal of emulsified oil from oily wastewater using agricultural  
349 waste barley straw. *Biochemical Engineering Journal*. 2010; 49: 78-83
- 350 29. Okiel K, El-Sayed M, El-Kady M. Treatment of oil-water emulsion by adsorption onto activated  
351 carbon. *Egyptian Journal of Petroleum*. 2011; 20: 9-15
- 352 30. Husin N, Abdulwahab N, Isa N, Boudrille R. Sorption equilibrium and kinetics of oil from  
353 aqueous solution using banana pseudo-stem fibres. *International conference on environment  
354 and industrial innovation*. 2011; 12: 177-183
- 355 31. Department of Petroleum Resources. The Environmental Guidelines and Standards for  
356 Petroleum Industry in Nigeria (EGASPIN). Lagos; 2002
- 357 32. American Petroleum Institute. Recommended practice for analysis of oilfield waters (RP-45).  
358 Washington DC: *Exploration and Production Department*; 1998
- 359 33. Rice EW, Baird RB, Eaton AD. Standard methods for the examination of water and  
360 wastewater 23<sup>rd</sup> ed. Washington DC: *American Public Health Association, American Water  
361 Works Association, Water Environment Federation*; 2017
- 362