

# **Original Research Article**

## **DEVELOPMENT OF PROXY MODELS FOR SCREENING WATER FLOOD AND GAS FLOOD CANDIDATES**

### **ABSTRACT**

Fluid-flood and other improved oil recovery techniques are becoming prominent in global petroleum production because a large proportion of production is from mature oil fields. Although water flooding and gas injection are well established techniques in the industry, several of the screening criteria in literature are discipline which could sometimes be subjective. This work used experimental design techniques to develop proxy models for predicting oil recovery under water-flood and gas-flood conditions.

The objective of the study is to develop a quantitative screening method that would allow for candidates to be evaluated and ranked for water flood or gas injection. The model was applied to some field cases and compared with published models and the well-known Welge Analysis method. The results show that the proxy models developed are quite robust and can be used for first pass screening of water and gas flood candidates.

Keywords: Water flooding, Gas flooding, Improved Oil Recovery, Response Surface Methodology

### **1. Introduction**

Improved oil recovery comprises any of the various methods apart from the primary recovery method (reservoir drive mechanism) designed to improve the flow of hydrocarbons from the reservoir to the wellbore; it is the second stage of hydrocarbon production during which an external fluid such as water or gas is injected into the reservoir through injection wells located in rocks that has fluid communication with the production wells. Many researchers have performed laboratory studies to show that CO<sub>2</sub> injection is a very effective enhanced oil recovery process for light and medium gravity reservoir oils (Willhite, 1998). Shtepani (2007) discussed PVT experiments, special coreflood experiments and numerical coreflood simulations to determine the micro-scale conformance of the CO<sub>2</sub> displacement and identify CO<sub>2</sub> breakthrough characteristics. He gave serious attention to the importance of water injection and other factors related with CO<sub>2</sub> injection, which could extend the miscible CO<sub>2</sub>-EOR technology to a broader range of oil reservoirs. He concluded that an accurate EOS characterization and phase behavior of reservoir fluids, based on extensive PVT measurements was key for a successful design.

According Alvarado and Manrique (2010) improved oil recovery methods compass enhanced oil recovery methods as well as new drilling and well monitoring technologies, intelligent reservoir management and control, advanced reservoir monitoring techniques as well as application of different enhancements of primary and secondary recovery processes.

**Comment [P1]:** Show the equation model and the precision

Several methods are available in assessing recoveries; for example laboratory/core analysis as well as intelligent well systems; this research will focus on the use of Design of Experiment and Response surface methodology.

Unlike primary recovery, IOR techniques are technically and economically intensive and require proper planning. This method has been extensively applied in assessing production uncertainties in channelized reservoirs (Friedman *et al.*, 2001) and creating development strategy alternative for Oil fields. (Carreras *et al.*, 2006) focused on the Tahiti field in deepwater Gulf of Mexico with primary hydrocarbon-bearing turbidite sands. Due to significant uncertainties remaining after appraisal, probabilistic methods were used to assess development alternatives. They applied the classical ED method to generate reservoir simulation models for the P10, P50 and P90 reservoirs of the field. The field development was done by performing ED runs which incorporated uncontrollable uncertainties and decisions as factors such as well counts and injection timing.

This method was used to manage subsurface uncertainties in the Niger Delta by Ogbalor and Peacock (2010). They concluded that experimental design provides a systematic consistent approach to managing uncertainties in field development studies because it reduces the amount of time and cost needed to analyse the impact of a range of subsurface parameters on business decisions. Separate response surface model should be generated for in-place as well as recoverable volumes, as the key sub-surface parameters which drive each model are likely to be different.

Reis (2006) applied the Experimental Design and Response Surface Methodology in Risk analysis, where one RSM was built to model the decision variable and another was built to represent an objective function that takes into account dynamic data. A relationship among the uncertainty variables obtained from the RSM of the objective function was applied to the RSM of the decision variable to constrain the model, enabling Risk analysis with history match. The results obtained were compared with that of an Artificial Neural Network (ANN).

Gupta *et al* (2008) presented a statistical method for performing history matching using experimental design framework. The objective of the experimental design based history matching was to independently quantify ultimate recovery for the studied field based on the production history, primarily water production and pressure matches. Their method quantifies the probability for each scenario based on identified history matching parameters. This methodology can easily be extended to include differential weights for history matching parameters. The success of the method depends on the generation of efficient design and subsequent model for acceptable modeling error

Cebastian and Osbon(2011) presented a comparison between the Experimental Design method and the simpler and quicker Monte-Carlo probabilistic technique used to manage subsurface uncertainty and provide estimates of hydrocarbon in-place and ultimate recovery. Some case studies were used to illustrate this and they concluded that ED tend to produce a wider ultimate recovery distribution compared to the probabilistic because the ED has a tendency to introduce more dependencies between input variables. These dependencies occur as a result of minimizing the simulation runs by combining multiple uncertainties. It was also realized that ED handled the dependencies on recovery factor more thoroughly than the probabilistic method.

Robertson, (2006) discussed laboratory works showing examples of improved recovery from low salinity water floods. He tried to quantify the improved oil recovery potentials from low-salinity waterfloods for specific fields. In his conclusion, he showed that oil recovery tended to increase with lower salinity floods.

Li and Friedmann, (2005) introduced a new method to effectively generate a response surface although, the input parameters have strong non-linear effects; the results showed that this method could successfully generate a response surface when the non-linear effects are normally distributed.

## 2. Methodology

Pareto chart and Plackett-Burman design were used to identify the nine imputed factors, and validation was done using Yale's Algorithms:

$$Ex = \frac{\sum Y(+)}{N/2} - \frac{\sum Y(-)}{N/2} \quad (1)$$

Using 20 experiments, a response surface was built using linear Equations (Equation 2) to describe the relationship between the recovery factor and the identified factors (Myers et al., 2008).

$$y = \beta_0 + \beta_1 x_1 + \dots + \beta_k x_k + \varepsilon \quad (2)$$

The fluid proxy models obtained were validated using secondary data: seven cases for the water flooding, and four cases for the gas injection problem. The results were compared with the Guthrie and Greenberger (1955) Predictive model (Equation 3) and ..... Buckley-Leverett/Welge analysis method (Equation 4 and 5)

$$E_r = 0.2719 \log(k) + 0.25569 S_{wi} - 0.1355 \log(\mu_o) - 1.538 \phi - 0.0003488 t + 0.11403 \quad ..(3)$$

$$RF_{oil} = \frac{(S_{w(av)} - S_{wi})}{(1 - S_{wi})} \quad (4)$$

$$RF_{gas} = \frac{(S_{g(av)} - S_{gi})}{(1 - S_{gi})} \quad (5)$$

## 3. Results and Discussion

The principal factors that affect each process were identified: Water-floodable Pore volume; Absolute Permeability; Capillary Pressure; Reservoir Pressure; Reservoir Depth; Fluid viscosity; hydrocarbon in Place at start of flood; Connate water saturation; Effective permeability measured at the immobile connate water saturation; Relative permeability; fluid saturation at start of flood; formation volume factor; injection rate and Pressure.

For the water-flood case; the proxy model generated is given by the equation:

$$RF_{oil} = A_0 + A_1 WPV + A_2 K + A_3 Pr + A_4 Swc + A_5 \mu_o + A_6 \mu_w + A_7 K_{ro(swr)} + A_8 S_o + A_9 B_o + A_{10} I_w \quad (6)$$

**Comment [P2]:** Improve the discussion about result and compare to the theory or the newest journal

For the gas injection under conditions of miscible flooding in non-dipping reservoirs; the proxy model generated is given by the equation:

$$RF_{gas} = B_0 + B_1GPV + B_2B_0 + B_3Ig + B_4Pinj + B_5Sgi + B_6N + B_7S_{oi} + B_8S_0 + B_9P \quad (7)$$

Where the constants are as shown in Table 1 below:

Table 1: Showing the constants and values for the Proxy Model

Constant	Value	Constant	Value
A <sub>0</sub>	-0.8051	B <sub>0</sub>	0.18565
A <sub>1</sub>	2.6519E-07	B <sub>1</sub>	-9.1385E-07
A <sub>2</sub>	-3.171E-06	B <sub>2</sub>	0.0434
A <sub>3</sub>	1.5834E-06	B <sub>3</sub>	-0.00061
A <sub>4</sub>	-0.01943	B <sub>4</sub>	4.497E-06
A <sub>5</sub>	0.000217	B <sub>5</sub>	3.566
A <sub>6</sub>	0.0005	B <sub>6</sub>	-2.234E-06
A <sub>7</sub>	0.00649	B <sub>7</sub>	-0.1320
A <sub>8</sub>	1.493	B <sub>8</sub>	-1.2471
A <sub>9</sub>	0.0139	B <sub>9</sub>	-3.8694E-07
A <sub>10</sub>	-2.34E-08		

Table 2: Results obtained using case studies (Water- Flooding) Recovery Factor (Fraction)

Case	Study	Guthrie and Greenberger model	Buckley Leverett/Welge Analysis	Study database
1	0.05	0.53	0.6	0.06
2	-0.02	-0.21	0.56	-0.05
3	0.19	0.38	0.45	0.42
4	0.12	0.18	0.49	0.18
5	0.131	0.27	0.38	0.089
6	0.5	0.66	0.43	0.15
7	0.16	0.22	0.15	0.07

From Table 2 it can be seen that Buckley Leverett/ Welge Analysis over-estimates recovery factor; this is because it considers recovery factor as a function of displacement efficiency only, areal and volumetric efficiencies are not accounted for. It can also be seen that the recovery factor and cumulative oil Produced follow the same trend in all cases; at high viscosities and water saturation, there is a close correlation between the recovery factor using Guthrie and Greenberger Water-Flood Predictive model and Buckley-Leverett/Welge's Analysis. It can also be observed that all cases apart from Case 1, 2 and 7, the cumulative oil produced in MMSTB calculated, predicted and obtained are close for the other cases.

Table 3: Results obtained using case studies for Gas injection (Recovery Factor )

Case	This Study	Guthrie and Greenberger	Buckley Leverett/Welge Analysis
1	0.05	0.01	0.33
2	0.03	0.03	0.4
3	0.07	0.07	0.31
4	0.05	0.01	0.34

4. From Table 3, it can be observed that Buckley Leverett/Welge's Analysis predicts high recoveries; as stated earlier; recovery factor is a function of displacement efficiency only though the Cumulative Oil Produced follows the same trend as the other cases; it can also be seen that there is a close correlation between the recovery factors and Cumulative Oil Produced.

These key parameters such as reservoir heterogeneity, dip, mobility ratio of the CO<sub>2</sub> to oil, injection rate, volume of CO<sub>2</sub> available affect performance of the recovery process and the nature of the reservoir fluids (Ifeanyichukwu et al., (2014). Proxy models were generated for the primary recovery and water flood oil recovery from the simulation results and Monte Carlo simulation was run using the proxy equations (Liu et al., 2008).

Figures 1 and 2 shows the recovery factors in fraction against the different cases under consideration for both water flooding and gas injection. Buckley Leverett method stands out in the gas injection but was not very distinct in the water flooding scenario.

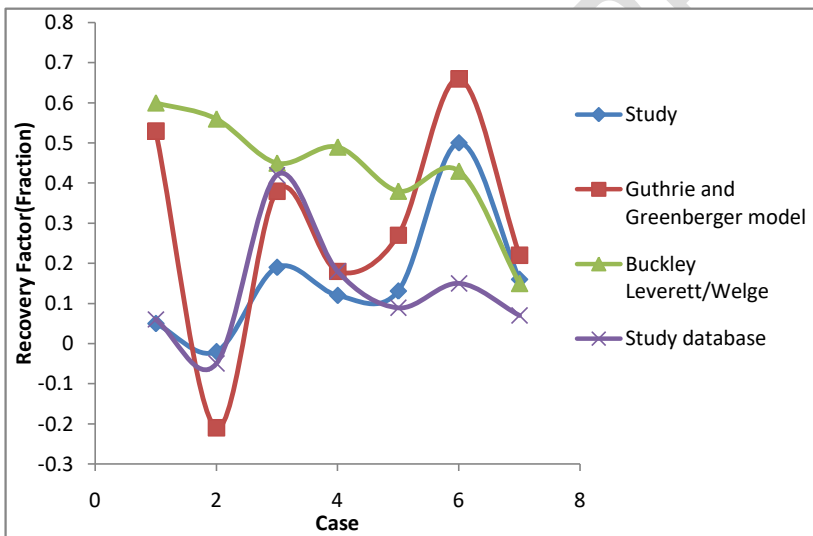


Figure 1: Plot of Recovery Factor (fraction) Versus Case Studies (Water-Flooding)

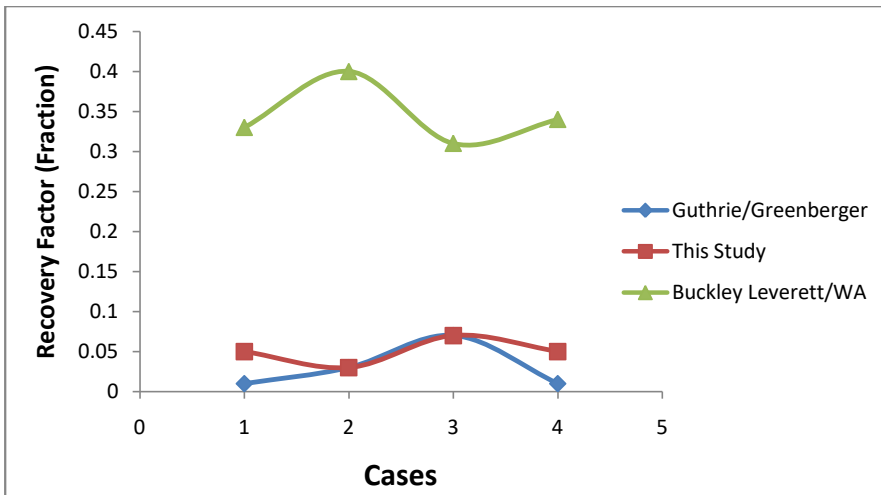


Figure 2: Plot of Recovery Factor (fraction) Versus Case Studies (Gas Injection)

Figure 3 shows the Pareto chart that indicates the main factors that affect oil originally in Place (OOIP), the relative permeability to oil and oil formation volume factor stands out clearly to affect the recovery process.

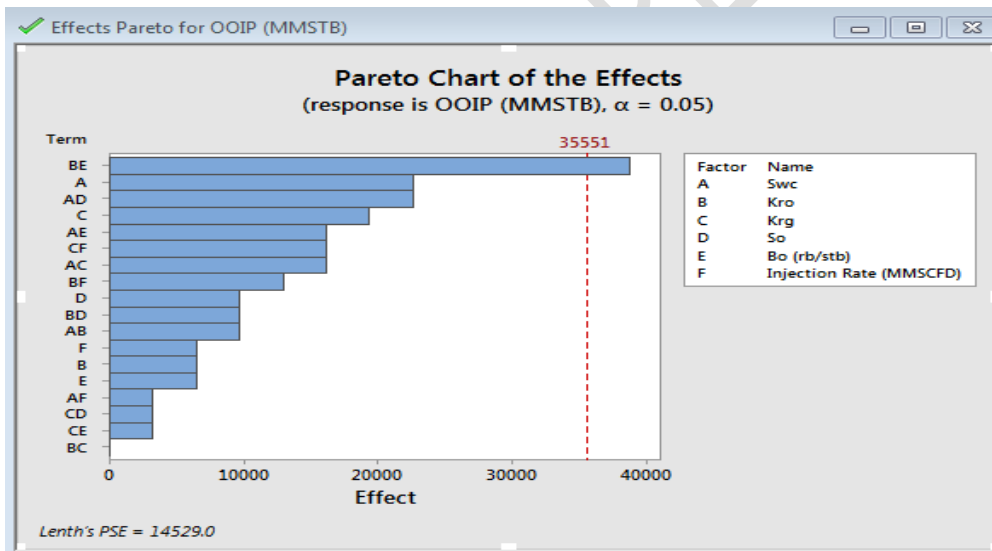


Figure 3: Pareto Chart for OOIP

## 5. Conclusion

Recovery factor of any improved oil recovery process can be expressed as a function of reservoir rocks and fluid properties; this function can be used to predict recoveries before extensive simulations are done. Design of Experiment and Response Surface Methodology can be used with a high degree of accuracy to predict oil recovery factors.

## ABBREVIATIONS/NOMENCLATURE

ANN Artificial Neural Network  
DOE Design of Experiment

RSM	Response Surface Methodology
IOR	Improved Oil Recovery
EOR	Enhanced Oil Recovery
PVT	Pressure Volume Temperature
ED	Experimental Design
EOS	Equation of State
BWPD	Barrels of Water per day
MMSTB	Million Stock tank barrels
MMSCF	Million Standard Cubic Feet
BSCF	Billion Standard Cubic Feet
K	Permeability
Ø	Porosity
μ	Viscosity
h	Formation Thickness
S	Saturation
RF	Recovery Factor
P	Pressure
PV	Pore Volume
B	Formation Volume Factor
OOIP	Original Oil In Place

#### Subscripts

o	Oil
w	water
g	gas
I	initial
Wc	connate water
av	Average

## 6. References

1. Alvarado V, Manrique E.. 2010 “*Enhanced Oil Recovery: An Update View.*” Energies.
2. Carreras PE, Turner SE, Wilkinson.GT. 2006 “*Tahiti: Development Strategy Assessment using Design of Experiments and Response Surface Methods.*”, SPE 100656 presented at the 2006 SPE Western Regional/AAPG Pacific Section/GSA Cordilleran Section Joint Meeting held in Anchorage, Alaska, USA, 8-10 May.
3. Cebastiant, A.; Osbon, RA. 2011 “Experimental Design for Resource Estimation: A Comparison with the Probabilistic Method.” SPE 147542 presented at the SPE Reservoir Characterization and Simulation Conference and Exhibition held in Abu Dhabi, UAE, 9-11 October.
4. Craft BC. Hawkins MF. Applied Petroleum Reservoir Engineering second Edition Prentice Hall Incorporated 1991.
5. Friedmann, F.,Chawathe A, Laure D. 2001 “*Uncertainty Assessment of Reservoir Performance using Experimental Designs.*” Canadian International Petroleum Conference.
6. Ghoojani, E. and Bolouri SH. 2011 Prediction of Water Flooding Performance in Core Scale: Comparison of Numerical Simulator, Neural Network Correlation. Brazilian Journal of Petroleum and Gas Volume 5 Number 4 pp. 209-216.
7. Gupta, R.; Collinson, R.; Smith GC, Ryan S, Louis SJ. 2008 “History Matching of Field Production Using Design of Experiments.”, SPE 115685 presented at the 2008 Asia Pacific Oil and Gas Conference and Exhibition held in Perth, Australia, 20-22 October.
8. Guthrie RK..Greenberger MH. The Use of Multiple Correlation Analysis for Interpreting Petroleum Engineering Data, *Drilling and Production, Prac.*,API ( 1955) 130.
9. Li B. and Friedmann 2005 Novel Multiple Resolutions Design of Experiment / Response Surface Methodology for Uncertainty Analysis of Reservoir Simulation Forecasts SPE 92853 presented at the SPE Reservoir Simulation Symposium held in Houston, Texas, 31 January-2 February.
10. Myers RH., Montgomery DC, Anderson-Cook C. 2008 Response Surface Methodology; process and Product Optimization Using Designed Experiments Third Edition 13-135 New York City John Wiley and Sons Inc.

11. Ogbalar C, and Peacock A. 2010 Using Experimental Design Table with Reservoir Simulation to Manage Sub Surface Uncertainties-A *Niger Delta Case Study.*”, SPE 140613 presented at the 34<sup>th</sup> Annual SPE International Conference and Exhibition held in Tinapa-Calabar, Nigeria, 31 July-7 August.
12. Reis.LC. 2006 “*Risk Analysis with History Matching Using Experimental Design or Artificial Neural Networks.*”, SPE 100255 presented at the SPE Europec/EAGE Annual Conference and Exhibition held in Vienna, Austria, 12-15 June.
13. Robertson E. 2007 Low Salinity Water Flooding to improve Oil Recovery- Historical Field Evidence SPE 109965 presented at the SPE Annual Technical Conference and Exhibition held in Anaheim, California USA. 11-14 November.
14. Shtepani. E. 2007 “*Experimental and Modeling Requirements for Compositional Simulation of Miscible CO<sub>2</sub> EOR Process.*” SPE 111290 presented at the 2007 SPE/EAGE Reservoir Characterization and Simulation Conference held in Abu Dhabi, UAE, 28-31 October.
15. Willhite GP. *Enhanced Oil Recovery* SPE Textbook series 6 Richardson TX, (1998) pp 22.
16. Ifeanyichukwu, P. C., Akpabio, J. U. and Isehunwa, S. O. (2014) Improved Oil Recovery by Carbon Dioxide Flooding *International Journal of Engineering Technology* 4(5): 229-235.
17. Liu, B., Dessenberger, R., McMillen, K., Lach, J. Kelkar, M. (2008) Water-flooding recovery incremental study in Middle Miocene to Paleocene Reservoirs Deep-Waters gulf of Mexico SPE 115669 presented at the SPE Asian Pacific oil and Gas Conference and exhibition held in Perth Australia 20-22c October, 2008.