

Original Research Article

Design and Construction of Electric Fish Smoking Kiln Using Locally Available Composite Materials

Abstract

The design and construction of low cost electric fish smoking kiln was undertaken with the aim of improving the existing fish-smoking kiln. The newly constructed kiln was made using locally available composite materials and technologies sourced locally. The kiln consists of smoking kiln chamber, heating elements, a variable thermostat, lagging materials of insulating clay wall which has a duration of not less than five years and metal frame made of angle iron on which the fish tray, oil collector pan were assembled. The production cost of the electric fish-smoking kiln is one hundred thousand naira compare with mechanical ones that cost within the range of three hundred thousand and four hundred thousand naira excluding transportation charges.

Keywords: Fish, Thermostat, Heating Element, Oil collection pan, Circuit Breaker.

1.0 INTRODUCTION

Fish is an important source of food and income to many people in developing countries. In Nigeria, most people depend wholly or partly on the fisheries sector for their livelihood. In recent time, many individuals and cooperatives are going into small and big scale fish farming (Adewuyi, 2010). Fish is an extremely perishable food item (Agbon, *et al.*, 2002). Soon after death, fish begins to spoil. In the healthy live fish, all the complex biochemical reactions are balanced and the fish flesh is sterile. After death however, irreversible change that results in fish spoilage begins to occur. The resultant effect is the decomposition of the fish (Akinola, *et al.*, 2006). Various factors are responsible for fish spoilage. The quality of capture is important at determining the rate of spoilage. Notably are the fish health status, the presence of parasites, bruises and wounds on the skin and the mode by which the fish was captured. The caught fish quality depends on the handling and preservation of the fish received from the hands of the fishermen/ fisher folk after capture.

The handling and the preservation practice after capture affects the degree of spoilage of the fish (Akinneye, *et al.*, 2007). The quality of the freshly caught fish and its usefulness for further utilization in processing is affected by the fish capture method. Unsuitable fishing method does not only cause mechanical damage to the fish, but also creates stress and the conditions, which accelerate fish deterioration after death. Fish is highly susceptible to deterioration without any preservative or processing measures (Okonta and Ekelemu, 2005). Akinola, *et al.*, (2006), reported that immediately the fish dies, a number of physiological and microbial deterioration set in and thereby degrade the fish (Delgade, *et al.*, 2003). Fish is a major source of protein and its harvesting,

handling, processing and distribution provide livelihood for millions of people as well as providing foreign exchange earning to many countries (Al-Jufaili and Opara, 2006). Improper processing especially with rudimentary smoking kilns can also negatively impact the amino acids profile and other mineral constituents of the fish.

In order to improve on these methods, several technological approaches has been reported, including harnessing the solar energy for fish drying, the use of electric heaters (Akinola, *et al.*, 2006), and the use of smoking kiln (Ikenweibe, 2010). **This present study is aimed at designing and construction of a cost effective locally made electric fish smoking kiln.** This study was carried out to design and construct a cost effective locally made electric fish-smoking kiln using materials sourced locally.

2.0 Study Area

Lake Kainji was formed by damming the river Niger at Kainji Island. The dam was closed on 2nd August, 1968 and the reservoir created after closure it has a surface area of 1,120km² at maximum-recorded level. The lake is 137km long, 24km wide and a maximum depth of 60 meters (Welcomme, 1972). Kainji Lake is in the Guinea savannah vegetation zone of the northwestern Nigeria. Kainji lake is located between longitude 9^o 20' and 10^o 55' East and latitude 4^o 22' and 4^o 45' North and a mean annual water temperature of 27.85^oC after construction (Abiodun, 2002), and catchment area of 1.6× 10km². The river Niger has two flood regimes, the black floods and white floods. Although the primary aim of the impoundment is to generate hydroelectric power. The lake also offers opportunities for developmental projects like irrigation farming, fisheries and navigation. Kainji Lake has its source from Futa Jalon in Niger Republic and from local rivers around the lake basin. It takes three to four months for the water from Futa Jalon to get to Kainji Lake especially the southern basin (Ogundana, 2013).

3.0 RESEACH METHODOLOGY

Research Materials

The materials used to construct the electric fish-smoking kiln includes 1.5mm flat mild steel sheet, angle bar of 2.54cm thickness. The electrical components (2000 watts capacity heating elements, 1.5mm wire, switch, and thermostat) were sourced from Owode Onirin Market Lagos, Nigeria. Mortar to build the kiln wall was formed from anthill clay (sourced from New Bussa, Nigeria).

3.1 Result

Kiln capacity (Volume):

The volume of a flat top kiln, V_k was calculated using Eq. 1 (Ward, 2015).

$$V_k = w \times h \times d \dots\dots\dots (1)$$

Where W = width of the electric fish smoking kiln = 0.80m

h = height of the electric fish smoking kiln = 0.2m

d = depth of the electric fish smoking kiln = 0.76m

$$V_k = 0.80 \times 2 \times 0.76 = 1.22\text{m}^3$$

Cross-Sectional Area of the Kiln’s heating Chamber

The interior cross sectional area of the kiln was computed using Eq. 2:

$$\text{Cross-sectional Area} = \text{Length} \times \text{Width} \dots\dots\dots (2)$$

$$\text{Cross-sectional Surface Area} = 80 \times 76 = 608\text{cm}^2$$

Element Surface Load

The surface load of an element estimates the wear or deterioration during a given period and it is measured in watts per square centimeter (W/sq. cm) (Olsen, 2001).

$$\text{Element Surface Load} = \text{power} / \text{surface area} \dots\dots\dots (3)$$

$$\text{Element surface Load} = 2000/608 = 3.290 \text{ w/sq.cm}$$

Electric Kiln Power (Kilowatts) Requirement

The required power for power (in kilowatts) of the electric kiln is a function the kiln’s volume temperature and the time required to reach the temperature (Olsen, 2001). Kiln voltage depends on the local power voltage. The voltage supply from Kainji hydro-electric station is 240V in New Bussa, Nigeria. The rate of the resistance element used is 2KW.

Thus:

$$P = IV \dots\dots\dots (4)$$

Where p = power, I = current and V = voltage

$$\text{Voltage} = 240\text{v, power} = 2000\text{watts}$$

$$\text{Current} = 2000/240 = 8.33\text{amps}$$

Resistance of the Electric Kiln Element (R)

Resistance is given according to ohms as:

$$R = \frac{V}{I} \dots\dots\dots (5)$$

Where V = voltage, I = current,

$$\text{Therefore; } R = 240/8.33 = 28.8\Omega$$

Smoke Chamber Volume Design

The volumetric capacity of smoke chamber in figure 2 was calculated in relation to the volume of sawdust it occupies. The chamber was separated from the heating chamber by perforated clay partition.

$$VP = L \times b \times h \quad \dots\dots\dots (6)$$

Where; L = length of smoke chamber = 0.66m

b= width of smoke chamber = 0.26m

h= height of smoke chamber = 0.18m

$$VP = 0.66 \times 0.26 \times 0.18 = 0.0309 \text{ m}^3$$

Fish Tray Design:

The volumetric capacity of each fish tray was calculated in relation to the volume of fish it occupies. Each tray was designed to contain 10 kg of fish per unit operation. In the designing of fish tray volumetric capacity, the shape of the compartment was designed to be rectangular. Lengths and breadth of the tray were assumed to be **the same** 0.75m, while the height was selected as 0.045m.

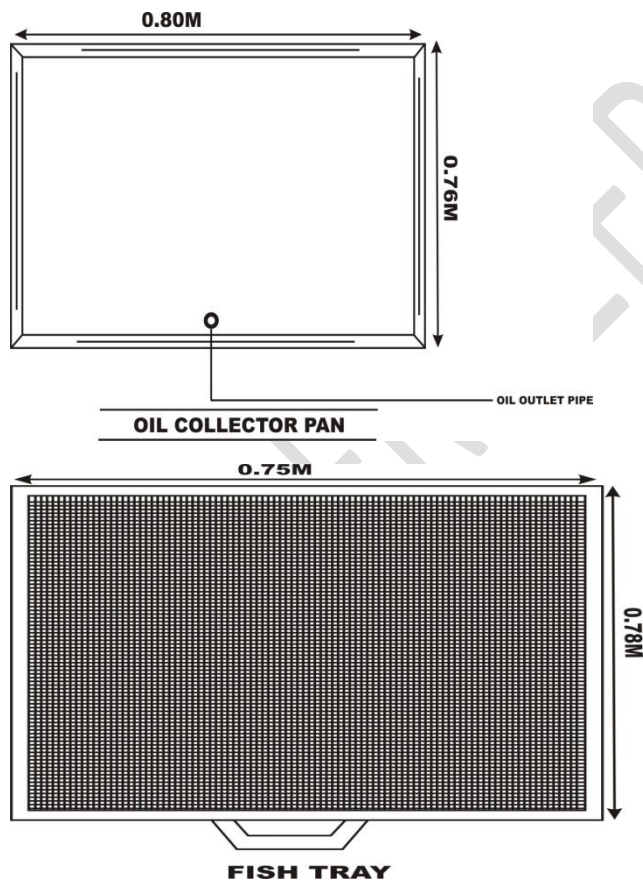


Figure 1: Oil Collector pan

Figure 2: Fish Tray

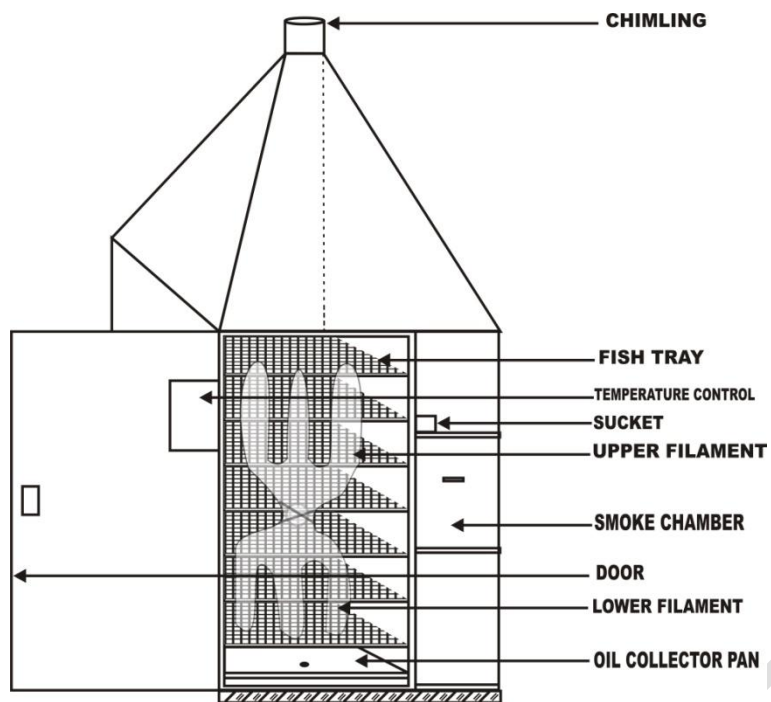


Figure 3: Schematic Diagram of Electric Fish Smoking Kiln

UNDER PEER REVIEW



Plate 1: Kiln Wall under Construction

The fish kiln built with anthill clay to enable sustainability of heat within the heating chamber having an iron frame structure inside the clay wall with structural dimension of 0.92 x 0.76 x 1.24m. Michael (2014) opined that using locally available composite materials reduce the cost of production. The electric heater is sited at the center wall inside the kiln and oil collecting pan is below the heating chamber which collects the fish oil extracted during drying. Adamu *et al.*, (2012) reported that increase in fish smoking with kiln powered by firewood has greatly increased the rate of afforestation. The right side of the chamber has a structure for smoking drawers separated from the heating chamber by a perforated clay wall that supplied smoke into the heating chamber, which has a rectangular shape to give the fish fine texture. Eyo, (2004) agreed that introduction of small combustibles will give fish brownish colour which is well accepted in Africa. There are provisions for eight rails of wire mesh trays in the chamber; each tray rests on the structure frame.

The kiln door was fabricated with galvanized iron having a thick cover lagged with fibers, which minimize heat loss from the kiln system. Temperature control meter was installed to control heat generated in the kiln system. Michael (2014) reported of lack of temperature control device in the existed kiln which leads to over drying. At the upper most point of the kiln, an opening (chimney) was provided for exit of excess heat and pressure in the kiln system.

Resistance Heating Element

The heating element used for the construction of the kiln is manufactured by Kenton incorporated with capacity of 2000watts, two elements pieces were installed and connected to an electric power source.

Mortar Paste

Clay is calcined at 1000⁰C, crushed and grounded to its finest form. The calcined clay is allowed to cool, there after ground using a pan mill and sieved with mesh 100 (< 150 μm) to the required size. Saw dust is sieved with mesh 100 (< 150 μm) in a pan mill. 70% of clay will be weighed out into a plastic container and the sieved saw dust of 30% is also weighted out and mixed with the clay and water to make the mix. The recipe will be thoroughly mixed to obtain a uniform body mixture. It is allowed to age overnight and re-mixed again to produce an insulating block. It was used for constructing kiln's wall, base and cover.

Material Selections

The materials selections for this research work were mild steel; the reason for choice of mild steel is its corrosion resistant property, strength durability and cost effectiveness. Basic drawing tools and computer software were used for the design work. The materials used for construction includes; Angle iron, Temperature control meter, Wire, Sawdust, Heating element, Insulating wool and fish species.



Plate 2: Electrical Fish Smoking Kiln Structure.

6.0

CONCLUSION

The materials used to construct the electric fish-smoking kiln to accommodate 70 – 80Kg were sourced locally. The construction design is simple and provided avenue for easy maintenance and

replacement of heating elements and further modification on the kiln. This kiln is simple to operate, cheap to maintain and the heat generated inside the smoking chamber is up to 350°C. The cost of the electric fish-smoking kiln is about #200,000.00k which would be profitable and reliable if all the necessary environmental factors are observed, to Kainji lake artisanal fish processor. Although there is wealth of theoretical and practical knowledge of fish kiln, this knowledge is applied irregularly or wrongly; designers and builders make avoidable mistakes owing to inadequate appreciation of local content (materials) to produce cheaper and highly efficient machineries.

REFERENCES

- Abiodun, J.A.(2002): Evaluation of fisheries catch trend on Lake Kainji in Nigeria. *Journal of Accessibility: A Case Study of Kainji Lake Basin, Nigeria.*
- Adamu I. G, Kabri H U, Hassain I.D and Mada A. D, (2013). Design and Construction of Fish Smoking Kiln, *Journal of Engineering and Technology Research, Volume 5 (1).* Pp 15-20
- Adewuyi, S. A., Philip, B. B., Ayinde, I. A., and Akerele, D., (2010): Analysis of Profitability of Fish Farming in Ogun State, Nigeria, *J Hum Ecol, 31(3):* pp 179-184 .
- Agbon, A.O., Ezeri, G.N.O., Ikenwiewe, B. N., Alegbeleye N.O., and Akomolede, D.T. (2002): A comparative study of different storage methods on the shelf life of smoked current fish. *J. Aquat. Sci., 17(2):* 134-136.
- Akinneye, J.O., Amoo, I.A. Amoo and S.T. Arannilewa., (2007): Effect of drying methods on the nutritional composition of three species of (*Bonga sp., Sardinella sp. and Heterotis niloticus*). *J. Fish. Int., 2(1):* 99-103.
- Akinola, O.A., Akinyemi, A.A., and Bolaji, B.O., (2006): Evaluation of traditional and solar drying systems towards enhancing fish storage and preservation in Nigeria (Abeokuta Local Government as a case study). *J. Fish. Int., 1(2-4):* 44-49.
- Al-Jufaili, M.S. and Opara, L.U., (2006): Status of fisheries postharvest industry in the Sultanate of Oman: Part1 handling and marketing system of fresh fish. *J. Fish. Int., 1(2-4):* 144-149b. *Applied Science and Environmental Management; 7(2)* 9-13.
- Delgade, C.L., Wada, M.W.N., Rosegran, S.M., and Ahmed, M., (2003): Fish for 2020: Supply and demand in changing global markets. International Food Policy Research Institute, Washington, D.C. and World Fish Centre, Penang, Malaysia.
- Eyo, A. A. (2004). Provost alerts Federal Government over foreign fishermen in Lake Kainji. In *The Guardian Newspaper Thursday, October 7, 2004 Vol. 21, No. 9,451* pg. 50.
- Ikenwiewe, B.O., (2010): Fabrication and Performance Assessment of a Locally Developed Fish Smoking Kiln, *Ocean Journal of Applied Sciences Vol. 3, No. 4 ISSN 1943-2429.*
- Micheal O. A. 2014, 'Development and Performance Evaluation of a Motorized Fish Smoking Kiln',

African Journal of Food Science and Technology, volume 5 (5), Pp 199-124

Ogundana, O.S. (2014): A Study of Fish Farmers Agricultural information needs and Accessibility: A Case Study of Kainji Lake Basin, Nigeria. Unpublished article.

Okonta, A.A. and Ekelemu, J.K., (2005): A preliminary study of micro-organisms associated with fish spoilage in Asaba, Southern Nigeria. Proceedings of the 20th Annual Conference of The Fisheries Society of Nigeria (FISON), Port Harcourt, 14th-18th November, pp: 557-560.

Olsen, F.L., (2001): The Kiln Book: materials, specification and construction. London: Krause Publication.

Ward, M., (2015): Calculating kiln volume. Retrieved April 15, 2015, from Clay Times Incorporation Website: <http://www.claytimes.com>

Welcome, R.L. (1972): The Kainji Experience in Fisheries Management in Large River, Compiled by R.L. Welcomme, Rome, 1972: FAO 1979. V. 160p-171, FAO Fisheries Technical papers No (1994).

UNDER PEER REVIEW